

# ONE

nylon cable ties  
series




## NYLON CABLE TIE

**Material:** Nylon 66, 94V-2 certificated by UL. Heat-resisting, erosion control, insulate well and not apt to age.

**Color:** Natural (or white, standard color), UV black and other colors are available as requested.



ITEM NO.	L		W MM	BUNDLE DIAMETER MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-2.5×60	2.4"	60	2.5	2-11	18	8
HT-2.5×80	3.2"	80		2-16		
HT-2.5×100	4.0"	100		2-22		
HT-2.5×120	4.7"	120		2-30		
HT-2.5×150	6.0"	150		2-35		
HT-2.5×160	6.3"	160		2-40		
HT-2.5×200	8.0"	200		3-50		
HT-3.6×140	5.5"	140	3.6	3-33	40	18
HT-3.6×150	6.0"	150		3-35		
HT-3.6×180	7.1"	180		3-42		
HT-3.6×200	8.0"	200		3-50		
HT-3.6×250	10"	250		3-65		
HT-3.6×280	11"	280		3-70		
HT-3.6×300	12"	300		3-80		
HT-3.6×370	14.6"	370	3-105			
HT-4.8×120	4.7"	120	4.8	3-30	50	22
HT-4.8×160	6.3"	160		3-40		
HT-4.8×180	7.1"	180		3-42		
HT-4.8×190	7.5"	190		3-46		
HT-4.8×200	8.0"	200		3-50		
HT-4.8×250	10"	250		3-65		
HT-4.8×280	11"	280		3-70		
HT-4.8×300	12"	300		3-80		
HT-4.8×350	14"	350		3-90		
HT-4.8×360	14.2"	360		3-94		
HT-4.8×370	14.6"	370		3-98		
HT-4.8×380	15"	380		3-102		
HT-4.8×400	16"	400		3-105		
HT-4.8×430	16.9"	430		3-120		
HT-4.8×450	17.7"	450	3-130			
HT-4.8×500	19.7"	500	3-150			
HT-7.2×150	6.0"	150	7.2	3-35	120	55
HT-7.2×200	8.0"	200		3-50		
HT-7.2×250	10"	250		4-65		
HT-7.2×280	11"	280		4-78		
HT-7.2×300	12"	300		4-80		
HT-7.2×350	14"	350		4-90		
HT-7.2×370	14.6"	370		4-98		
HT-7.2×380	15"	380		4-100		
HT-7.2×400	16"	400		4-105		
HT-7.2×450	18"	450		4-110		
HT-7.2×500	20"	500		4-150		
HT-7.2×530	20.9"	530		4-160		
HT-7.2×550	21.6"	550		4-165		

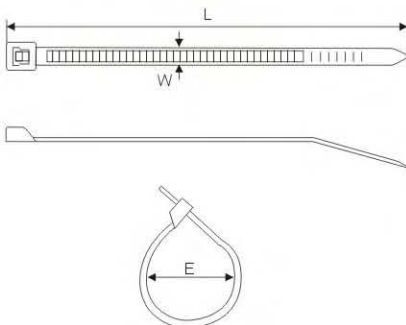

Electrolines Est.

ITEM NO.	L		W MM	BUNDLE DIAMETER MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-9.0×400	16"	400	9.0	8-105	175	79.4
HT-9.0×450	18"	450		8-118		
HT-9.0×500	20"	500		8-150		
HT-9.0×550	21.6"	550		8-160		
HT-9.0×600	23.6"	600		8-170		
HT-9.0×650	25.6"	650		8-185		
HT-9.0×720	28.3"	720		10-195		
HT-9.0×800	31.5"	800		10-230		
HT-9.0×900	35.5"	900		10-265		
HT-9.0×1000	29.4"	1000		10-300		
HT-9.0×1100	43.3"	1100		10-335		
HT-9.0×1200	47.2"	1200		10-370		
HT-12×650	25.6"	650	12	14-185	250	114
HT-12×900	25.5"	900		14-265		




### MOUNTABLE HEAD TIES

**Material:** Nylon 66 certificated by UL.

**Usage:** after bundling wires, fix them on plate with screw.

ITEM NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-100MH	4"	100	2.5	22	18	8.0	100PCS
HT-100MA	4"	100	3.6	22	40	18	
HT-150MH	6"	150		32			
HT-200MH	8"	200	4.8	42	50	22	
HT-300MH	12"	300	7.2	80	50	22	
HT-200MA	8"	200	7.2	50	120	55	
HT-350MA	14"	350	7.2	90	120	55	

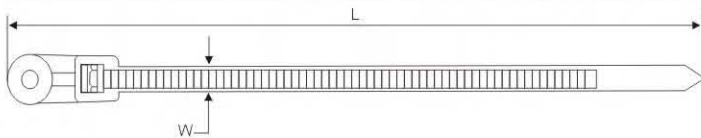

### CARD BAND

**Material:** Polyethylene PE

**Usage:** Wrap electrical cords for shipping and packaging. Inexpensive and Releasable.

**Color:** Clear, Black

ITEM NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-100CB	4"	100	=	25	18	8	100PCS
HT-120CB	4.7"	120		30			
HT-150CB	6"	150	=	39	30	14	



**Electrolines Est.**

## MARKER TIES

**Material:** Nylon 66 94V-2 certificated by UL. Acidcontrol and not easy to age.

**Usage:** No blank tag at the entrance of cable tie, then write down the marker on the tag.

ITEM.NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		MM
	INCH	MM			LBS	KGS	
HT-100MT	4"	100	2.5	22	18	8.0	25×8
HT-200MT	8"	200	4.6	50	50	22.0	4.6×200
HT-210MT		210	3.0				




## RELEASABLE CABLE TIE

**Material:** Nylon 66 certificated by UL.

**Usage:** These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

ITEM.NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-150RT	6"	150	7.2	35	50	22	100PCS
HT-200RT	8"	200		50			
HT-250RT	10"	250		65			
HT-300RT	12"	300		80			
HT-200RTA	8"	200	4.8	50	50	22	100PCS




## RELEASABLE LASHING CABLE TIE

**Material:** Nylon 66 certificated by UL.

**Usage:** These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

ITEM.NO.	L	W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
				LBS	KGS	
HT-100	100	3.6	22	40	18	100PCS
HT-150	150	4.7	35	50	22	
HT-200	200	4.7	50	50	22	
HT-250	250	4.8	65	50	22	

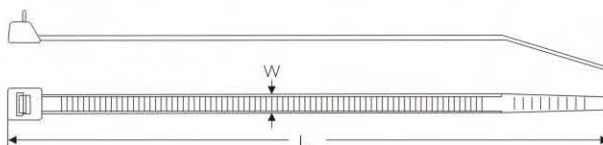



**Electrolines Est.**

## PUSH MOUNT TIES

**Material:** Nylon 66, 94V-2, agreed by UL. Acid and corrode resisting, insulate, last long and not apt to age.

**Usage:** insert tie to the hole of table and tighten it.

ITEM NO.	L		W MM	MAX. BUNDLE DIA. MM	TENSILE STRENGTH		孔徑(φ) HOLE DIA		板機厚度 PANEL THICKNESS		包裝 PACKING
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM	
HT-100PT	4"	100	2.5	25	18	8.0	0.189	4.8	0.094	2.4	100PCS
HT-150PT	6"	155	3.6	35	40	18	0.181	4.6	0.091	2.3	
HT-200PT	8"	200	4.8	50	50	22	0.236	6.0	0.118	3.0	

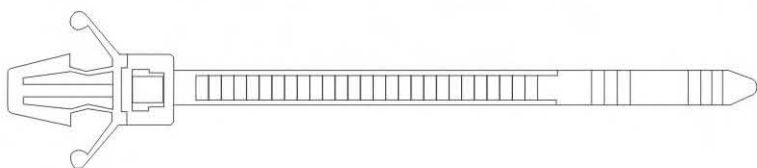


## DOUBLE LOCKING CABLE TIES

**Material:** Nylon 12 94V-2 certificated by UL. Acid-control and not easy to age.

**Usage:** double locking, strong supporting capacity


ITEM NO.	L		W MM	MAX BUNDLE DIA. MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-180DDL	7"	180	9.0	45	8.8	40
HT-260DL	10 1/4"	260	9.0	66	110	50
HT-350DL	13 5/8"	350	9.0	90	110	50

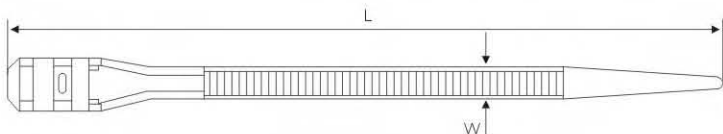

## DOUBLE HEAD CABLE TIE

**Material:** Nylon 12 94V-2 certificated by UL.

ITEM NO.	L		W MM	D1		D2		TENSILE STRENGTH		PACKING
	INCH	MM		MAX.	MIN.	MAX.	MIN.	LBS	KGS	
RDCV-225	8 7/8"	225	4.8	59	2.5	52	2.0	50	22	100PCS
RDCV-300	11 7/8"	300	4.8	83	2.5	76	2.0	50	22	
RDCV-370	14 9/16"	370	4.8	105	2.5	98	2.0	50	22	

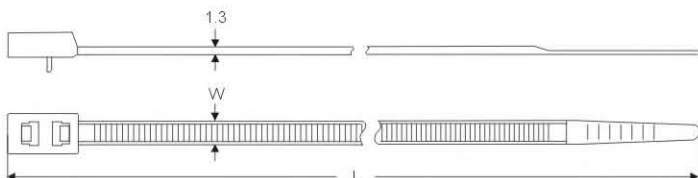

Electrolines Est.


### KNOT TIE(BALL TYPE)

**Material:** Nylon 66 certified by UL.

**Usage:** Beaded design keeps wires from shifting or slipping.



ITEM NO .	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-100KTA	4"	100	=	25	18	8	100PCS
HT-120KTA	4.7"	120		30			
HT-150KTA	6"	150	=	39	30	14	



### CABLE ZINCIFICATION TIE

**Material:** Nylon 66, 94V-2 certified by UL. Heat-resisting, erosion control, insulate well and not apt to age.

**Color:** Natural, UV black and other colors are available as requested.




ITEM NO .	L		W MM	BUNDLE DIAMETER MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-4" × 100	4"	100	2.5	22	18	8
HT-6" × 150	6"	150	3.6	35	40	18
HT-8" × 200	8"	200	3.6	50	40	18
HT-10" × 250	10"	250	4.8	65	50	22
HT-12" × 300	12"	300	4.8	80	50	22

### HT CABLE TIE HOLDER



ITEM.NO.	H	H1	W	L	L1	PACKING
HT-6	31	6.0	8.0	12.7	9.7	100PCS
HT-8	37	6.0	10	12.7	9.7	100PCS

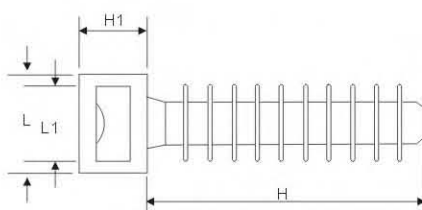

Electrolines Est.



RoHS



**ELECTROLINE**  
QUALITY ELECTRICAL FITTINGS  
MANUFACTURING COMPANY


## CABLE TIE MOUNTS

**Material:** UL approved Nylon 66, 94V-2, with imported adhesive sticker. Good insulation, long lasting and uneasy to age.

**How to use:** Remove the cover of the adhesive and stick the piece properly, then put in cable tie for using.

**Application:** Used where hole-drilling is not allowed. easy and time-saving.

ITEM NO.	L × W (MM)	H MM	T MM	CM	PCS/CTN	KG
HT-20	20×20	6.1	5.0	52×35×36	20000	20/18
HT-25	25×25	7.5	6.2	52×35×36	10000	19/17
HT-30	30×30	8.7	6.4	54×33×32	6000	18/16
HT-40	40×40	6.4	10.8	54×33×32	3000	17/15




## SADDLE TYPE TIE MOUNTS

**Material:** UL approved Nylon 66, 94V-2

**Application:** Saddle design provide maximun stability to wire bundles. To apply, simply fix mount with a screw and secure wire bundles with HONT nylon cable ties.

ITEM NO.	H	L	W	T	B	Packing
HC-1	7	15	10	5	3	100PCS
HC-1S	5.8	12.8	7	4	3.3	
HC-2S	9	23	16	9	5	
HC-2	9	23	16	9	6	
HC-2L	9	23	16	9	6.5	

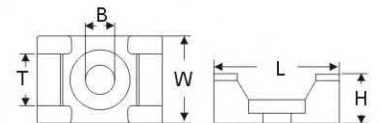

Electrolines Est.

P. O. Box. 942 Yanbu Saudi Arabia Tel: +966 4 3225418 Fax: +966 4 3222213 Al-Jubail: Tel: +966 3 3632967 Fax: +966 3 3612967