

# TWO

wire/cable strap  
stainless steel belt keeper



## WIRE / CABLE STRAP SERIES

### A+B DIE-CUT CABLE TIE(LAMINATE)

Fastening tape/mushroom/soft-hook/plastic fastening tape laminating, etc.....



Specification	Specification
12×125	13×240
12×150	13×330
12×200	

Note: a back-to-back Velcro material  
2 material back-to-back buckling Y-shaped small hook  
The first back-to-back 3 of mushrooms  
Professional Bangdai processing, customer size-based style, with a production mode

### A+B DIE-CUT CABLE TIE(ULTRASONIC WELDING)



Specification	Specification
15×250	10×180

Note: Customer can select required products, according to their actual requirements.

### MOBILE PHONE CHARGER/CABLE STRAP



Specification	Specification
7×200	12×200

Note: Customer can select required products, according to their actual requirements.

## WIRE / CABLE STRAP SERIES

### BUCKLE STRAP WITH LOGO PRINTING



Specification	Specification	Specification	Specification	Specification	Specification
16 × 200	20 × 250	25 × 250	30 × 300	38 × 400	50 × 500
16 × 250	20 × 300	25 × 300	30 × 350	38 × 450	50 × 600
16 × 300	20 × 350	25 × 350	30 × 400	38 × 500	50 × 700
16 × 350	20 × 400	25 × 400	30 × 450	38 × 550	50 × 800
16 × 400	20 × 450	25 × 450	30 × 500	38 × 600	50 × 900
16 × 450	20 × 500	25 × 500	30 × 550	38 × 650	50 × 1000
16 × 500	20 × 550	25 × 550	30 × 600	38 × 700	50 × 1100
16 × 550	20 × 600	25 × 600	30 × 650	38 × 750	50 × 1200
16 × 600	20 × 650	25 × 650	30 × 700	38 × 800	50 × 1300
16 × 650	20 × 700	25 × 700	30 × 750	38 × 850	50 × 1400
16 × 700	20 × 750	25 × 750	30 × 800	38 × 900	50 × 1500
16 × 750	20 × 800	25 × 800	30 × 850	38 × 950	50 × 1600
16 × 800	20 × 850	25 × 850	30 × 900	38 × 1000	50 × 1800
16 × 850	20 × 900	25 × 900	30 × 950	38 × 1100	
16 × 900	20 × 950	25 × 950	30 × 1000	38 × 1200	
16 × 1000	20 × 1000	25 × 1000	30 × 1200	38 × 1500	

### NOTE-BOOK/CABLE STRAP



Note: Customer can select required products, according to their actual requirements.

### COIN/SQUARE



Note: Customer can select required products, according to their actual requirements.

## D.I.Y PACKETS SERIES



## FASTENING TAPE

length: 25mm per roll.  
width: 12, 5, 16, 20, 25, 30, 38, 50, 75, 100, 125mm.

### PACKING INFORMATION

WIDTH	YARD/ROLL	ROLL/CASE	QUANTITY
16mm	27.5y/r	60r	1650y
20mm	27.5y/r	50r	1375y
25mm	27.5y/r	40r	1100y
30mm	27.5y/r	32r	880y
38mm	27.5y/r	28r	770y
50mm	27.5y/r	20r	550y
75mm	27.5y/r	14r	385y
100m	27.5y/r	10r	275y

30 standard colors are available for our book&loop tapes. Because it is different to organize, different to some extent while dyeing generally regard 80% as the acceptable standard to the color rate.



RoHS



**ELECTROLINE**  
QUALITY ELECTRICAL FITTINGS  
MANUFACTURING COMPANY

## STAINLESS STEEL LOCK STEEL BALL TIES(301-304-316)

### Standard and characteristic

Stainless steel cable technical feature brought to pitch accord with " electric equipment of boat ", No. of IEC92, totally " is it mould with GB1113-85 metal cable is it bring to pitch to make " and " steel seagoing vessel enter magnitude and build norm " relevant regulation. Pitch and take the normal environment temperature of condition of work - 25 degrees Centigrade - 60 degrees Centigrade, working  $\pm$  85 degrees Centigrade of temperature,  $\geq$  500N of pulling force, noumenonn material ICr18Ni9, coating P.V.C. Suitable for tying up the cable in the internal and external places of the room, such as in the open, humidity, high temperature , etc., resist and rub , be anticorrosive , resist and radiate and fire prevention performance .

規格 Specification	規格 Specification	規格 Specification
4.6 × 127	7.6 × 150	13 × 200
4.6 × 152	7.6 × 200	13 × 250
4.6 × 200	7.6 × 250	13 × 300
4.6 × 250	7.6 × 300	13 × 350
4.6 × 300	7.6 × 350	13 × 400
4.6 × 350	7.6 × 400	13 × 450
4.6 × 400	7.6 × 450	13 × 500
4.6 × 450	7.6 × 500	13 × 550
4.6 × 500	7.6 × 550	13 × 600
4.6 × 550	7.6 × 600	13 × 650
4.6 × 600	7.6 × 650	13 × 700
4.6 × 650	7.6 × 700	13 × 750
4.6 × 700	7.6 × 750	13 × 800
4.6 × 750	7.6 × 800	13 × 850
4.6 × 800	7.6 × 850	13 × 900
	7.6 × 900	13 × 950
	7.6 × 950	13 × 1000
	7.6 × 1000	13 × 1050
	7.6 × 1050	13 × 1100
	7.6 × 1100	13 × 1200



### STAINLESS STEEL TIE (LADDER TYPE)



ITEM NO.	Max Bundle Dia		"L" Length Approx		"W" Width Approx		Min Loop Tensile		Pkg. Qty.
	inch	mm	inch	mm	inch	mm	lbs	Kg	
HT-150S	.86	22	5.9	150	.28	7	250	113.4	100
HT-195S	1.7	45	8	195					
HT-255S	2.5	64	10	255					
HT-335S	3.5	89	13	335					
HT-490S	5.4	139	19	490					
HT-635S	7.2	185	25	635					
HT-150M	.86	22	5.9	150	.472	12	250	113.4	100
HT-195M	1.7	45	8	195					
HT-255M	2.5	64	10	255					
HT-335M	3.5	89	13	335					
HT-490M	5.4	139	19	490					
HT-635M	7.2	185	25	635					



### UNIVERSAL CLAMPING BAND(304-316)

The stainless steel trusses up bringing, the international advanced technology, import equipment and material adopted are manufactured. It is it take, is it is it form a complete set object regular, truss up, tighten, install use new-type to fasten the fixture to deduct to pitch to pitch. No matter on the land, the ocean or the sky, no matter industry, agriculture, transportation, communication, electricity, chemical industry, traffic, urban construction, etc. are used in each field extensively.

規格 Specification	規格 Specification
10×200	13×250
10×250	13×300
10×300	13×350
10×400	13×450
10×500	13×600
10×600	13×700
10×700	13×800
10×800	13×1000
10×900	13×1200
10×1000	13×1500

## UNIVERSAL CLAMPING BAND

The stainless steel trusses up bringing, the international advanced technology, import equipment and material adopted are manufactured. It is it take, is it is it form a complete set object regular, truss up, tighten, install use new-type to fasten the fixture to deduct to pitch to pitch. No matter on the land, the ocean or the sky, no matter industry, agriculture, transportation, communication, electricity, chemical industry, traffic, urban construction, etc. are used in each field extensively.

### Caliper prefabricating type

Model no	Specification	Unit	Use range (mm)
HT1006	10×0.6	-	Φ25~Φ250
HT1606	16×0.6	-	Φ25~Φ250
HT1008	10×0.8	-	Φ37~Φ250
HT1608	16×0.8	-	Φ50~Φ300
HT1908	19×0.8	-	Φ75~Φ500

### 预制棒状式 Strip prefabricating type

Model no	Specification	Unit	Use range (mm)
HT1006	10×0.6	-	80~800
HT1606	16×0.6	-	80~800
HT1008	10×0.8	-	120~800
HT1608	16×0.8	-	160~1000
HT1908	19×0.8	-	240~1500



## CABLE TIE TOOLS

### HT-705

**Function:**For Stainless steel ties, Fasten and automatic cut ties, with adjustable bundling pressure.

**Length:**178×140×29

**Weight:**560g

**Stainless steel tie:**Thickness up to 0.3mm, Width up to 7.9mm.



### SPRIAL WRAPPING BAND OF BOEING COMPANY

**Material:** The stainless steel trusses up bringing, the international advanced technology, import equipment and material adopted are manufactured.

**Specification:** S3175-2 S3175-3 S3175-4



### NYLON STAINLESS STEEL INLAY BLOCK TIES

#### Standard and characteristic

Nylon is it bring technical feature accord with IEC92-3-84 standard and GB3126-82 "boat nonmetal cable is it lead to pitch " professional standard totally to pitch. Pitching bringing environment temperature - 25 degrees Centigrade - 60 degrees Centigrade of use, tensile strength accords with the standard request.

#### Material and characteristic

Adopt 66 materials of nylon to make, insulating and of good performance, difficult firing, easy to operate, the characteristics, such as one of worker's province in the province, etc..



Specification	Specification	Specification
4.8 × 200	8 × 145	10 × 350
4.8 × 250	8 × 175	10 × 400
4.8 × 300	8 × 200	10 × 450
	8 × 240	10 × 500
	10 × 280	10 × 550
	10 × 300	10 × 610

### FISSION STYLE CABLE TIE ( DIVISION BETWEEN CABLE TIE LOCK AND CABLE TIE BODY )



Specification
7.2 × 1500
7.2 × 2000
7.2 × 3000
7.2 × 4000
7.2 × 5000
7.2 × 6000



## HT-001-A STAINLESS STEEL BAND CLEMPES

### Standard and characteristic

Stainless steel band clamps (clip band, satisfaction clip) is mainly used not only for attaching cable, grounding conductors etc, but also for electrification railway, pole of telecommunication, trafficsights and singpole, etc.

The detail is as following:


1. Stainless steel band clamps is consisted of belt, clamp, ratch wheel and so on. The clamp is made of high quality 1mm thickness stainless steel. The belt is also made of stainless steel whose width is 14mm and thickness is 0.2mm. After the two edges of the belt are hemmed, the width of the belt is 10mm. The belt has strong intension and pull. The two edges of the belt are smooth.

2. Stainless steel band clamps are convenient to use. The clamp is capable of easily attaching, detaching or fastening the belt, and it can not be liable to loosen inadvertently.

3. The length of stainless steel band clamps is in accordance to customer's requirement. At present there are 400mm, 600mm, 800mm, 1000mm, 1200mm, 1500mm, 2000mm specifications and so on.



ITEM.NO.	Max Bundle Dia		"L" Length Approx		"W" Width Approx		"E" Head Approx		Pkg Qty.
	inch	mm	inch	mm	inch	mm	inch	mm	
HT-1100	11.8	330	43.3	1100	.394	10.0	1.900	48.0	25
HT-1315	15.0	380	51.7	1315	.394	10.0	1.900	48.0	25

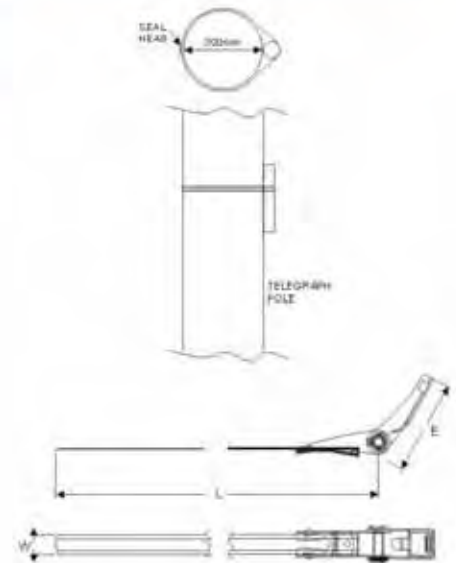

## MARKER PLATE


ITEM NO.	L(mm)	W(mm)	C(mm)
HTPS-4.5	88.9	9.5	5.9
HTPM-4.5	88.9	19.0	6.2



### STAINLESS STEEL TIE (RELEASABLE TYPE WITH NYLON COATING)



ITEM.NO.	Max Bundle Dia		"L" Length Approx		"W" Width Approx		Min Loop Tensile		Pkg Qty.
	inch	mm	inch	mm	inch	mm	lbs	Kg	
HTC-152S	1.5	38	6	152	6.3	24.8	300	136	100
HTC-229S	2.5	63	9	229					
HTC-305S	3.5	86	12	305					
HTC-457S	5.4	137	18	457					
HTC-810S	7.3	185	24	610					

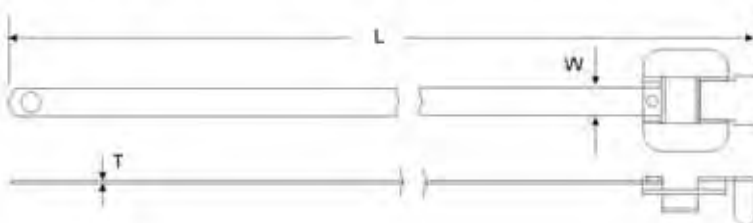

### ZD BELT KEEPER STEEL

Use range (mm)	Modelo			Packing Size	A	B	D	Pressure-resistance strength (Mpa/cm <sup>2</sup> )	Anti-torque valve (N.m)
	(L) 9mm Strip Width 9mm	(L) 12mm Strip Width 12mm	(L) 13mm Strip Width 13mm						
8-12	7610090012			100/2000	20	10	12	1.4	25-5
10-16	7610090016			100/2000	20	10	16	1.4	25-5
12-20	7610090020		7810130020	100/1000	20	10	20	1.4	25-5
12-22	7610090022		7810130022	100/1000	20	10	22	1.4	25-5
16-25	7610090025	7710120025	7810130025	100/1000	20	10	25	1.4	25-6
16-27	7610090027	7710120027	7810130027	100/1000	20	10	27	1.4	25-6
20-32	7610090032	7710120032	7810130032	100/1000	25	10	32	0.7	25-6
25-40	7610090040	7710120040	7810130040	100/1000	25	10	40	0.7	35-7
30-45	7610090045	7710120045	7810130045	100/1000	25	10	45	0.7	35-7
32-50	7610090050	7710120050	7810130050	100/1000	25	10	50	0.7	35-7
40-60	7610090060	7710120060	7810130060	100/1000	25	10	60	0.7	35-7
50-70	7610090070	7710120070	7810130070	50/500	25	10	70	0.7	35-7
60-80	7610090080	7710120080	7810130080	50/500	25	10	80	0.3	5-10
70-90	7610090090	7710120090	7810130090	50/500	25	10	90	0.3	5-10
80-100	7610090100	7710120100	7810130100	20/300	25	10	100	0.3	5-10
90-110	7610090110	7710120110	7810130110	20/300	25	10	110	0.3	5-10
100-120	7610090120	7710120120	7810130120	20/300	25	10	120	0.3	5-10
110-130	7610090130	7710120130	7810130130	20/300	25	10	130	0.3	5-10
120-140	7610090140	7710120140	7810130140	20/300	25	10	140	0.3	5-10
130-150	7610090150	7710120150	7810130150	20/300	25	10	150	0.3	5-10
140-160	7610090160	7710120160	7810130160	20/300	25	10	160	0.3	5-10

